


VYPR 2x


SPECIFICATIONS

Light Source	LED
Spectrum	I G
PPF	900 $\mu\text{mol/s}$
Input Power	342W
Efficacy	2.6 $\mu\text{mol/J}$
Input Voltage	Autosensing 100-277V, 347V, 400V & 480V*
Fixture Dimensions Weight	24.1" L x 2.9" W x 3.3" H 4lbs 15oz 61.2cm L x 7.4cm W x 8.3cm H 2.2kg
Power Supply Dimensions Weight	22" L x 6.2" W x 2.4" H 9lbs 55.9cm L x 15.8cm W x 6.1cm H 4.1kg
Mounting Height	$\geq 18"$ (45.7cm) Above Canopy
Thermal Management	Passive
Dimming	0-10V
Light Distribution	120°
Lifetime	L90: > 50,000hrs
Power Factor	> 90%
Certifications	UL 8800, UL 1598 Wet Location Rated, IP66 & CE
Warranty	5 Year Standard Warranty

PhysioSpec Indoor™



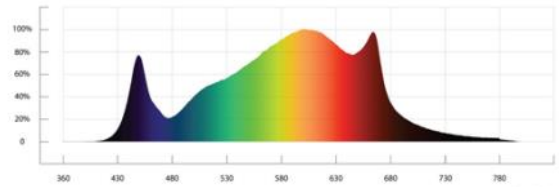


PhysioSpec Greenhouse™

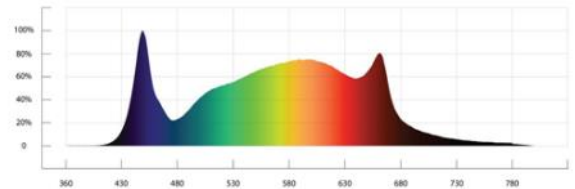

MAX AMPERAGE BY VOLTAGE SERVICE

VOLTAGE	120V	208V	240V	277V	347V	400V	480V
AMPERAGE	2.85A	1.64A	1.43A	1.23A	1.02A	0.88A	0.73A

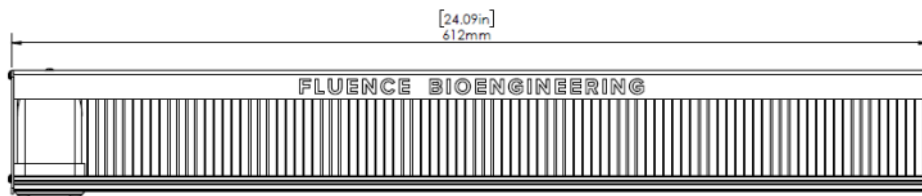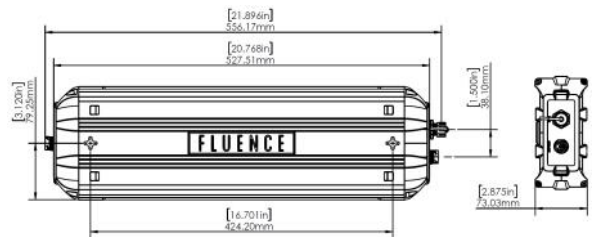

FAMILY	MODEL	SPECTRUM	INPUT VOLTAGE	AC POWER CORD	AC PLUG TYPE	DC EXTENSION CORD	MOUNTING HARDWARE
VR	VYPR 2x X	I PhysioSpec Indoor™	1	100-277V	06	6 ft (1.83m)	N5P NEMA 5-15P
			3	347V*	15	15 ft (4.57m)	N6P NEMA 6-15P
		G PhysioSpec Greenhouse™	4	400V*	L7P	NEMA L7-15P	
			5	480V*	TFP	Schuko Type F	
					PTP	Pigtails	
					03	3 ft (.91m)	S Square Brackets
					06	6 ft (1.83m)	U Unistrut Brackets
							P Pipe Brackets